



STREET CURBING

ITEM #E-2
WEIGHT - SEE CHART BELOW


ITEM #	TYPE	LENGTH	QUANTITY FOR 90 DEG ANGLE	WEIGHT (LBS)
E-201	STRAIGHT	6'-0"	2	760
E-202	2' RAD	3'-1 3/4"	1	400
E-203	3' RAD	4'-8 1/2"	1	640
E-204	5' RAD	3'-11 1/2"	2	560
E-205	9' RAD	4'-8 1/2"	3	600
E-206	10' RAD	5'-2 7/8"	3	680
E-207	15' RAD	5'-10 3/4"	4	800
E-208	20' RAD	5'-2 7/8"	6	560
E-209	25' RAD	5'-7 3/8"	7	680
E-210	30' RAD	5'-10 3/4"	8	800
E-211	35' RAD	5'-6"	10	760
E-212	40' RAD	5'-8 1/2"	11	760
E-213	45' RAD	5'-10 3/4"	12	800
E-214	50' RAD	5'-7 3/8"	14	690
E-215	60' RAD	5'-10 3/4"	16	800

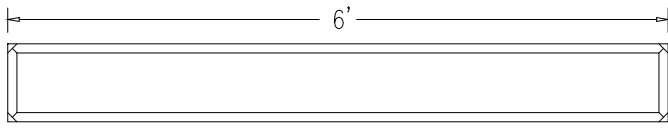


PLAN VIEW

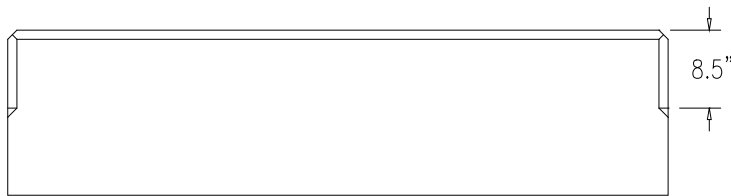

FRONT VIEW



TYPICAL SECTION VIEW

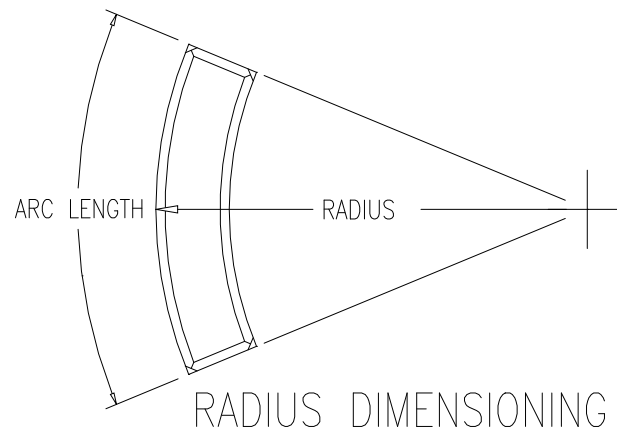

RADIUS DIMENSIONING

DESIGN NOTES:

- 1 - CONCRETE 6000 PSI AT 28 DAYS.
- 2 - REINFORCING WITH (2) - #4 REBARS.
- 3 - APPROXIMATE WEIGHT 130 LBS/LF.
- 4 - RADII LARGER THAN 60FT ARE FORMED FROM STRAIGHT SECTIONS.
- 5 - ALL CURBING SHOULD BE COATED WITH A CLEAR SEALER EACH FALL TO PROTECT FROM ROAD SALT DAMAGE. CHECK WITH US FOR APPROPRIATE TYPE.